

Microcom 238B Battery Powered Thermal Printer

Re-chargeable ticket/tag printer



Fast and portable.

Prints anywhere you need to go.

Sometimes the fastest way to get tickets to a customer is to bring the box office to them! That's where the new Microcom Model 238B battery powered printer comes in. Designed for remote ticketing applications, Microcom's Model 238B is lightweight, compact, and powerful enough to print thousands of tickets on a single battery charge. Grab your laptop or tablet and 238B printer for quick, efficient mobile ticketing.

Key Features include:

- Compact footprint
- Top or bottom black line sensor
- 100% duty cycle printing
- Standard reliable rotary cutter
- Long life print head
- 6" per second print speed
- Automatic paper loading
- Field replaceable wear parts



(740) 548-6262
8220 Green Meadows Drive North
Lewis Center, Ohio 43035
www.microcomcorp.com

Microcom Model 238B


Microcom's Model 238B may be small in size, but there is nothing small about its performance. Thanks to the ultra capacity battery, the 238B can print up to 4,000 tickets on a single charge, for worry-free ticketing all day long. Simply place on the charger overnight and repeat! Features internal ticket tray for a 2" stack of two-fold credit card sized tickets (approx. 350) or 2" stack of single fold standard entertainment tickets (approx. 175). Use as a stand-alone printer or mount to a mobile cart for easy line-length management.

The 238B comes standard with 300 dpi print resolution, a heavy duty rotary cutter that can slice through ticket stock up to 13 mils thick, and high-speed USB connectivity. Use with the Microcom Windows driver or standard ticket language for compatibility with most software programs.

Contact the sales team and discover why the 238B is the perfect fit for your ticketing application!

Application Overview:

- Event Ticketing
- Gaming/ Casino (TITO)
- Promotion
- Transportation

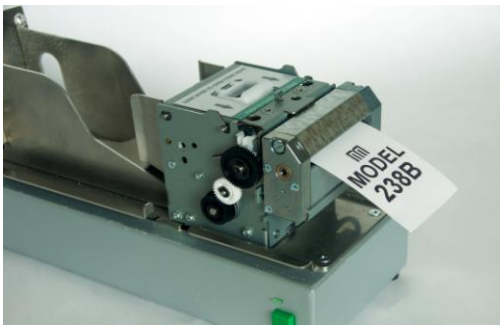

Microcom 238B Battery Powered Thermal Printer

For more information visit our website at www.microcomcorp.com or call (740) 548-6262

Performance Summary ♦♦♦

- 300 dpi print resolution
- Up to 6" (152mm) per second
- Automatic paper loading capability
- Windows® driver
- Standard ticket language
- Black line sensor configurable to sense bottom or top of media
- USB interface
- Heavy duty rotary cutter
- Software controlled print contrast adjustment
- Adjustable or locking media guides
- Up to 4,000 standard tickets printed per battery charge

Bar Codes ♦♦♦

- Code 39
- GS1-128 (UCC/EAN 128)
- Code 128
- Codabar
- Interleaved 2 of 5
- Intelligent Mail (4-State)
- GS1 DataMatrix (ECC 200)
- Postnet
- Planet Code
- And More

Fonts ♦♦♦

- Downloadable font support
- All fonts expandable in height and width up to 255X and 255Y
- 0, 90, 180 and 270 degrees font and bar code printing

Printing ♦♦♦

- Direct thermal, on demand ticket/tag printing
- Fanfold media with black sense mark
- Print thickness: up to .013" (.33mm)
- Print width: 1"-2.25" (25.4mm-58mm)
- Fixed paper guide widths of 25.4mm, 44mm, and 58mm, or adjustable guides

Memory ♦♦♦

- Up to 20MB Flash
- Up to 8MB RAM

Physical Dimensions ♦♦♦

Height	Width	Depth	Weight
6" (152mm)	5" (127mm)	12" (305mm)	7.1 lbs. (3.2 kg)

Environmental Conditions ♦♦♦

- Relative humidity: 10-85% non-condensing
- Operation temperature: 32° to 104° F (0° to 40° C)
- Power supply: External Battery Charger with Auto-Sensing; 100-240 VAC, 3.5/1.5 A, 50-60 Hz

Compliance ♦♦♦

- RoHS
- FCC Class A
- cTUVus

Warranty ♦♦♦

- One year limited warranty

Microcom 238B Optional Features

- Catch Tray (Hopper)
- Mounting Tray



(740) 548-6262
8220 Green Meadows Drive North
Lewis Center, Ohio 43035

Visit us at www.microcomcorp.com

References in this publication to Microcom Corporation products or services do not imply that we intend to make them available in all countries.

This product is RoHS compliant.



© Copyright 2016 Microcom Corporation. All rights reserved.

Microcom Corporation reserves the right to make improvements to their products at any time without prior notice. The information contained herein is subject to change without notice. Microcom Corporation shall not be liable for technical or editorial omissions contained herein. Reproduction, adaptation or translation without prior written permission is prohibited, except as allowed under the copyright laws. All company and product names are trademarks or registered trademarks of their respective owner.

830024-0005